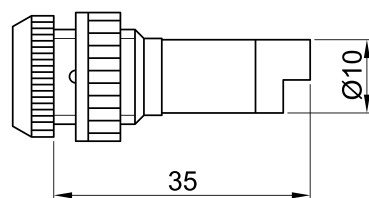
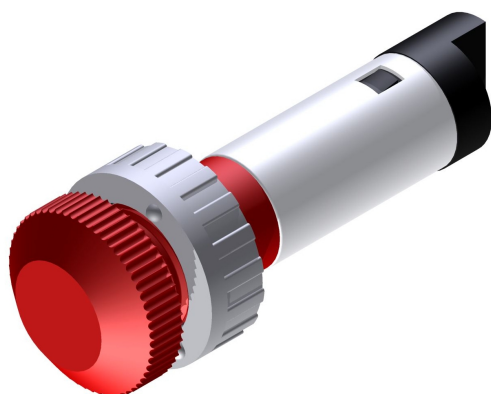




SLIM S.r.l.

Via dei Tigli, 14/16 (Z.I.)
20853 - Biassono (Monza Brianza) - Italy
commerciale@slim.it
www.slim.it

CODE: **FQ/SC**


















Light indicator with a device for quick connection

Light indicator with nut locking

It can be supplied with mounted or separated nut or lens

Lamps	incandescent • neon/fluoro • LED
Working Voltage	2V • 6V • 12V • 24V • 48V • 110V • 250V • 400V
Working temperature	120°C Max • 150°C Max
Hole diameter	10mm
Recommended thickness panel	from 0,5mm to 5mm
Method of connection to the panel	with nut
Type of connection	quick connection
Type of lens	SC1 • SC2 • SC3 • SC4 • SC5 • SC6 • SC7 • SC8 • SC9 • SC10 • SC11 • SC12 • SC13 • SC14 • SC15 • SC16

Lenses available

SC 1 	SC 2 	SC 3 	SC 4 	SC 5 	SC 6 	SC 7 	SC 8 
SC 9 	SC 10 	SC 11 	SC 12 	SC 13 	SC 14 	SC 15 	SC 16 